

VGR · Screw-Terminal · 6000 h/105 °C

High Ripple · Bottom cooling design · Low ESR

> Specifications · Spezifikationen

Items	Characteristics
Temperature range	-40°C ~ + 105°C
Capacitance tolerance (at 20°C)	Standard +/- 20%, -10/+30% on request
Surge voltage / Ripple voltage	Repetitive max. 30 sec per 6 Minutes / ≤ 50V
Leakage current max. I _L (20°C, 5 min)	0.01 • C • V _r [μA] or 5 mA, which is smaller.
Useful life	6 000 hours at 105°C
Field failure rate	0.5 FIT = 0.5 • 10 ⁻⁹ Failures/hour
RoHS conform	Directive 2011/65/EU & (EU)2015/863
Specification / Vibration	JIS C 5101-4 / 0.75mm, 10...55Hz, 10g, 3x2h



> Outline Drawings · Bauformen

Shape: B (ØD = 51-101)
(for Bolt – Mounting, M12x16, stud bolt is not isolated)


Form: B (ØD = 51-101)
(für Bolzenbefestigung, M12x16, Bolzen nicht isoliert)

Shape: N (for PBT-Holder ØD = 77-101 and Press Ring ØD = 64-90)

Form: N (für PBT-Halter ØD = 77-101 und Einpressring ØD = 64-90)

Shape: Y (ØD = 51-101)
(double sleeve, Y-bracket free of charge)

Form: Y (ØD = 51-101)
(mit doppelter Isolierung, Y-Schelle wird kostenlos mitgeliefert)

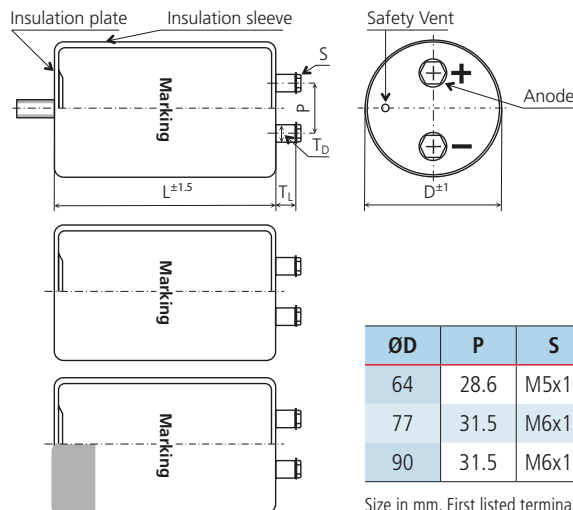

ØD	P	S	T _L	T _D	Cap material
64	28.6	M5x10	8.0	11	PH
77	31.5	M6x12	9.0	12	PH
90	31.5	M6x12	8.0	12	PH

Size in mm. First listed terminal is standard.

> Product Code · Bestellbezeichnung

Example: Series VGR · 12000 μF +/- 20 % · 400 V · D=90 mm · L=190 mm with Y-Bracket

Type of series		Capacitance code		Fixing symbol code		Case code diameter		Customers' specification	
Code	Voltage	Code	Voltage	Code	Code	ØD	Code	Code	Length
VGR	2G	123		Y	F	90	F	190	()
The first two digits are significant. The last digit indicates the number of following zeros in μF.				B : Bolt ØD = 51 - 101 N : No double sleeve (PBT-Safety-holder or press ring) Y : 3 Stoppers Bracket ØD = 64 – 90				Length in mm (3 digits)	
Rated voltage code				For bolt: Case length +1mm					
2V	350	2W	450						
2G	400	2H	500						

Rated VoltageCode (Surge Voltage) V_r [V DC]	Capacitance C_r [μ F]	Ripple Current at 105°C/120Hz I_r [A RMS]	Ripple Current at 40°C/120Hz [A RMS]	ESR (typ) at 20°C/100Hz [m Ω]	Zmax at 20°C/10kHz [m Ω]	ESL (typ) [nH]	Dissipation Factor at 20°C/120Hz Tan δ	DxL [mm]	Product Code # = variable value, see fixing code in the product code
350 VDC Code: 2V Surge Voltage 400 VDC	3 300	15.1	34.7	16	19	18	0.2	64x107	VGR2V332#D107
	3 900	16.8	38.6	14	16	18	0.2	64x123	VGR2V392#D123
	4 700	18.2	41.9	11	13	18	0.2	64x147	VGR2V472#D147
		20.6	47.4	11	13	20	0.2	77x108	VGR2V472#E108
	5 600	20.3	46.7	10	11	18	0.2	64x164	VGR2V562#D164
		23.1	53.1	10	11	20	0.2	77x124	VGR2V562#E124
	6 800	22.6	52.0	8	10	18	0.2	64x187	VGR2V682#D187
		24.9	57.3	8	10	20	0.2	77x148	VGR2V682#E148
		28.6	65.8	8	10	20	0.2	90x110	VGR2V682#F110
	8 200	27.9	64.2	7	8	20	0.2	77x165	VGR2V822#E165
		31.0	71.3	7	8	20	0.2	90x150	VGR2V822#F150
	10 000	31.0	71.3	5	7	20	0.2	77x188	VGR2V103#E188
		34.2	78.7	5	7	20	0.2	90x150	VGR2V103#F150
	12 000	35.1	80.7	5	5	20	0.2	77x228	VGR2V123#E228
		36.8	84.6	5	5	20	0.2	90x167	VGR2V123#F167
15 000	41.5	95.5	4	5	20	0.2	90x190	VGR2V153#F190	
18 000	44.3	101.9*	3	4	20	0.2	90x230	VGR2V183#F230	
400 VDC Code: 2G Surge Voltage 450 VDC	2 700	13.6	31.3	20	23	18	0.2	64x107	VGR2G272#D107
	3 300	15.5	35.7	16	19	18	0.2	64x123	VGR2G332#D123
	3 900	16.5	38.0	14	16	18	0.2	64x147	VGR2G392#D147
		18.8	43.2	14	16	20	0.2	77x108	VGR2G392#E108
	4 700	18.6	42.8	11	13	18	0.2	64x164	VGR2G472#D164
		21.2	48.8	11	13	20	0.2	77x124	VGR2G472#E124
	5 600	20.5	47.2	10	11	18	0.2	64x187	VGR2G562#D187
		22.6	52.0	10	11	20	0.2	77x148	VGR2G562#E148
		26.0	59.8	10	11	20	0.2	90x110	VGR2G562#F110
	6 800	24.9	57.3	8	10	20	0.2	77x148	VGR2G682#E148
		25.4	58.4	8	10	20	0.2	77x165	VGR2G682#E165
		28.6	65.8	8	10	20	0.2	90x93	VGR2G682#F093
		28.2	64.9	8	10	20	0.2	90x150	VGR2G682#F150
	8 200	27.4	63.0	7	8	20	0.2	77x148	VGR2G822#E148
		28.1	64.6	7	8	20	0.2	77x188	VGR2G822#E188
31.0		71.3	7	8	20	0.2	90x150	VGR2G822#F150	
10 000	32.0	73.6	5	7	20	0.2	77x228	VGR2G103#E228	
	33.6	77.3	5	7	20	0.2	90x167	VGR2G103#F167	
12 000	37.1	85.3	5	5	20	0.2	90x190	VGR2G123#F190	
15 000	40.4	92.9	4	5	20	0.2	90x230	VGR2G153#F230	
450 VDC Code: 2W Surge Voltage 500 VDC	2 200	12.6	29.0	24	28	18	0.2	64x107	VGR2W222#D107
	2 700	14.4	33.1	20	23	18	0.2	64x123	VGR2W272#D123
		16.1	37.0	20	23	20	0.2	77x108	VGR2W272#E108
	3 300	15.6	35.9	16	19	18	0.2	64x147	VGR2W332#D147
		18.2	41.9	16	19	20	0.2	77x124	VGR2W332#E124
	3 900	17.5	40.3	14	16	18	0.2	64x164	VGR2W392#D164
		19.4	44.6	14	16	20	0.2	77x148	VGR2W392#E148
22.3	51.3	14	16	20	0.2	90x110	VGR2W392#F110		

Additional designs on request · Weitere Designs auf Anfrage

VGR · Screw-Terminal · 6000 h/105 °C

Rated VoltageCode (Surge Voltage) V_r [V DC]	Capacitance C_r [μF]	Ripple Current at 105°C/120Hz I_r [A RMS]	Ripple Current at 40°C/120Hz [A RMS]	ESR (typ) at 20°C/100Hz [mΩ]	Zmax at 20°C/10kHz [mΩ]	ESL (typ) [nH]	Dissipation Factor at 20°C/120Hz Tan δ	DxL [mm]	Product Code # = variable value, see fixing code in the product code	
450 VDC Code: 2W Surge Voltage 500 VDC	4 700	19.3	44.4	11	13	18	0.2	64x187	VGR2W472#D187	
		21.3	49.0	11	13	20	0.2	77x148	VGR2W472#E148	
		24.2	55.7	11	13	20	0.2	90x126	VGR2W472#F126	
	5 600	23.7	54.5	10	11	20	0.2	77x165	VGR2W562#E165	
		26.3	60.5	10	11	20	0.2	90x150	VGR2W562#F150	
	6 800	26.3	60.5	8	10	20	0.2	77x188	VGR2W682#E188	
		28.5	65.6	8	10	20	0.2	90x167	VGR2W682#F167	
	8 200	29.8	68.5	7	8	20	0.2	77x228	VGR2W822#E228	
		31.5	72.5	7	8	20	0.2	90x190	VGR2W822#F190	
	10 000	33.9	78.0	5	7	20	0.2	90x230	VGR2W103#F230	
	500 VDC Code: 2H Surge Voltage 550 VDC	1 500	8.4	19.3	38	45	18	0.2	64x107	VGR2H152#D107
		1 800	9.5	21.9	32	38	18	0.2	64x123	VGR2H182#D123
2 200		10.3	23.7	26	31	18	0.2	64x147	VGR2H222#D147	
		11.7	26.9	26	31	20	0.2	77x108	VGR2H222#E108	
2 700		11.8	27.1	22	26	18	0.2	64x187	VGR2H272#D187	
		13.3	30.6	22	26	20	0.2	77x124	VGR2H272#E124	
3 300		14.4	33.1	18	21	18	0.2	77x148	VGR2H332#E148	
		16.5	38.0	18	21	20	0.2	90x110	VGR2H332#F110	
3 900		15.9	36.6	15	18	20	0.2	77x165	VGR2H392#E165	
		17.8	40.9	15	18	20	0.2	90x126	VGR2H392#F126	
4 700		17.6	40.5	13	15	20	0.2	77x188	VGR2H472#E188	
		19.4	44.6	13	15	20	0.2	90x150	VGR2H472#F150	
5 600		19.8	45.5	11	13	20	0.2	77x228	VGR2H562#E228	
		20.8	47.8	11	13	20	0.2	90x167	VGR2H562#F167	
6 800		23.1	53.1	9	10	20	0.2	90x190	VGR2H682#F190	
8 200		24.7	56.8	8	8	20	0.2	90x230	VGR2H822#F230	

* Please contact us if load condition exceeds 100A RMS

> Ripple Current Multiplier · Wechselstrommultiplikator

Frequency [Hz]	50/60	120	300	1k	≥ 10k	Forced cooling [m/sec]	v < 0.5	v ≥ 0.5	v ≥ 2.0	v ≥ 3.0
Multiplier	0.80	1.00	1.18	1.34	1.45	Multiplier	1.00	1.10	1.20	1.25

Ta (°C)	40	50	60	65	70	75	80	85	90	95	100	105
Multiplier	2.3	2.1	2.0	1.9	1.9	1.8	1.7	1.6	1.4	1.2	1.1	1.0

Additional designs on request · Weitere Designs auf Anfrage

> Life Time Table · Brauchbarkeitsdauer – Tabelle


VGR	Useful life as function of ambient temperature and ripple current												
	I_r at 105°C	x 1.0	x 1.1	x 1.2	x 1.4	x 1.6	x 1.7	x 1.8	x 1.9	x 2.0	x 2.1	x 2.2	x 2.3
$T_a = 40^\circ\text{C}$	250	250	250	250	250	250	250	250	250	213	152	106	73
$T_a = 45^\circ\text{C}$	250	250	250	250	250	250	250	250	186	135	96	67	
$T_a = 50^\circ\text{C}$	250	250	250	250	250	250	213	160	117	85	61		
$T_a = 55^\circ\text{C}$	250	250	250	250	177	135	101	74	54	38			
$T_a = 60^\circ\text{C}$	250	250	250	184	112	85	64	47	34				
$T_a = 65^\circ\text{C}$	250	216	178	116	70	54	40	29					
$T_a = 70^\circ\text{C}$	162	136	113	73	44	34	25	18					
$T_a = 75^\circ\text{C}$	102	86	71	46	28	21	16						
$T_a = 80^\circ\text{C}$	64	54	45	29	17	13							
$T_a = 85^\circ\text{C}$	41	34	28	18	11								
$T_a = 90^\circ\text{C}$	25	21	18	11									
$T_a = 95^\circ\text{C}$	16	13	11										
$T_a = 100^\circ\text{C}$	10	8											
$T_a = 105^\circ\text{C}$	6												

khrs Max. value limited to 250 000 hours.

> Life Time Graph · Brauchbarkeitsdauer – Diagramm

Useful life depending on ambient temperature T_a and ripple current operating conditions I_r versus rated ripple current at the upper category temperature $I_r, 105^\circ\text{C}, 120\text{Hz}$

Brauchbarkeitsdauer in Abhängigkeit von Umgebungstemperatur T_a und Wechselstrombelastung I_r im Verhältnis zur max. Wechselstrombelastung bei oberer Kategorie-temperatur $I_r, 105^\circ\text{C}, 120\text{Hz}$

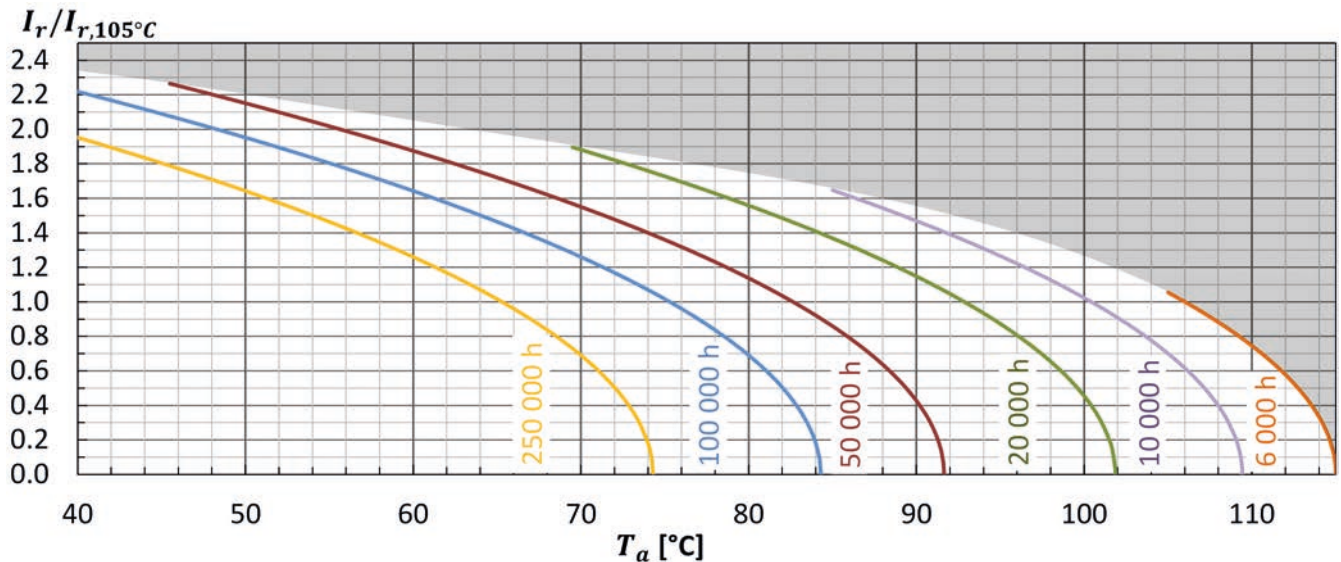

> Life Time Tests and Requirements · Anforderungen Brauchbarkeitsdauer

Life time test	Test procedure	Life time criteria
Endurance test	$T_a = 105^\circ\text{C}$; V_r, I_r applied 4000 hours	$\Delta C/C \leq 15\%$ (of initial value) $\text{Tan}\delta \leq 175\%$ (of specified value) $I_L \leq$ specified value
Useful life	$T_a = 105^\circ\text{C}$; V_r, I_r applied 6000 hours	$\Delta C/C \leq 20\%$ (of initial value) $\text{Tan}\delta < 200\%$ (of specified value) $I_L \leq$ specified value

Reference Specification: JIS C 5101-4, JIS C 5102, IEC 60384-4